

## Specification Sheet


Part Number: MB4SHA0C2

For use with HellermannTyton T18 - T50 cable ties to provide stability when securing bundles.

The rubber-based adhesive is an economical choice ideal for indoor applications, with a static load weight of 1.1 lb.

A predrilled hole extends mounting options and solutions.

Extended adhesive liner is easy to remove quickly.

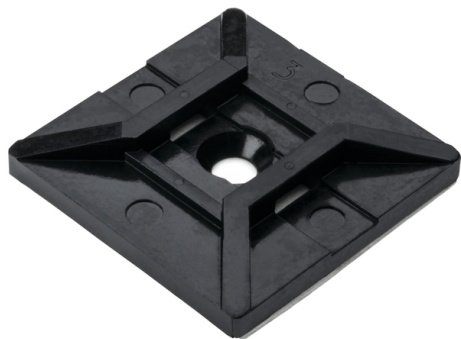

Rubber Adhesive Cable Tie Mount, 1.12 x 1.12", Use With T18-T50 Cable Tie, PA66, Black, 100/pkg

Article Number 151-29200

Type MB4SHA

Color Black (BK)

Quantity Per pack

Product Description MB4SHA adhesive mounts are for use with HellermannTyton T18 - T50 Series cable ties to provide stability when securing bundles. The rubber adhesive-backed mounts can be used to secure a bundle and have a predrilled hole to extend mounting options.

Short Description Rubber Adhesive Cable Tie Mount, 1.12 x 1.12", Use With T18-T50 Cable Tie, PA66, Black, 100/pkg

|                                     |                      |
|-------------------------------------|----------------------|
| Global Part Name                    | MB4SHA-PA66-BK       |
| Length L (Imperial)                 | 1.12                 |
| Length L (Metric)                   | 28.3                 |
| Fixation Method                     | Adhesive             |
| Width W (Imperial)                  | 1.12                 |
| Width W (Metric)                    | 28.3                 |
| Cable Ties                          | T18 - T50            |
| Height H (Imperial)                 | .23                  |
| Height H (Metric)                   | 5.8                  |
| Cable Tie Width Max (Imperial)      | 0.18                 |
| Cable Tie Width Max (Metric)        | 4.6                  |
| Mounting Hole Diameter D (Imperial) | 0.15 "               |
| Mounting Hole Diameter D (Metric)   | 3.9 mm               |
| Material                            | Polyamide 6.6 (PA66) |
| Material Shortcut                   | PA66                 |

|                                |   |
|--------------------------------|---|
| Adhesive                       | Synthetic rubber with base of polyethylene foam |
| Flammability                   | UL 94 V-2 (excluding adhesive)                  |
| UV Resistant (Yes/No)          | No  |
| Use Conditions                 | For Indoor and Outdoor Use                      |
| Adhesive Operating Temperature | 0°F to +150°F (-18 °C to +66 °C)                |
| Operating Temperature          | -40°F to +185°F (-40°C to +85°C)                |
| Reach Compliant (Article 33)   | Yes   |
| ROHS Compliant                 | Yes   |
| Package Quantity (Imperial)    | 100   |
| Package Quantity (Metric)      | 100   |
| Customs Number                 | 3926909988                                      |

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: [corp@htamericas.com](mailto:corp@htamericas.com)

© 2026 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Privacy Policy](#)

[Cookie Policy](#)

[Terms and Conditions](#)